

**Description :**

**Conductor**

22AWG x 2 Pairs (7/0.26mm) Tinned Copper Wire

**Insulation : PE**

Insulation Thickness : 0.25 mm

Insulation Diameter : 1.30 mm

**Construction**

Each Insulation Paired

2 Pairs Twisted Together with Aluminum Mylar Tape,

Tinned copper wire 22AWG (7/0.26mm) Worked as drain wire and also Braid Shield 85% Coverage.

**Jacket : PVC**

Jacket Thickness : 0.80 mm

Overall Diameter : 6.70 mm

**Messenger :**

Nominal Diameter of Messenger : 1.60 mm (7/7/0.16mm Strand)

Nominal Diameter Overall Jacket for Messenger : 3.30 mm

Nominal Jacket Thickness for Messenger : 0.85 mm


**Listing and Ratings**


: UL Type CL3 (E125840)

: CSA Type AWM FT4 (LL80602)

**Voltage Rate : 300V**

**Temperature Rate : 75°C**

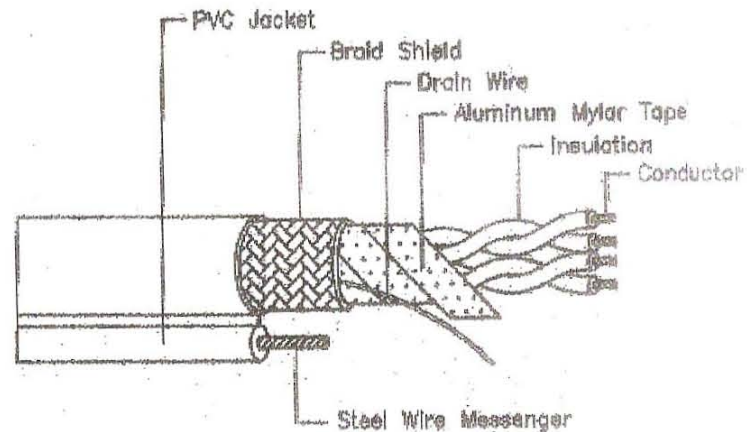

Designed by date	Checked by - date	Approved by - date	Date	Size	Scale	
			28/09/2011	A4		
 HOSINWELL TECHNOLOGY CO., LTD.					Part Name	Unit
					Computer & Data Cable	
					Part No.	Issued
					IEDC2202P-S	1
Ref. No.	Sheet					
	1 of 1					
Used On						