

Description :

Conductor

22AWG x 4 Pairs (7/0.26mm) Tinned Copper Wire

Insulation : PE

Insulation Thickness : 0.25 mm

Insulation Diameter : 1.30 mm

Construction

Each Insulation Paired

4 Pairs twisted together with Aluminum mylar tape,

Tinned copper wire 22AWG (7/0.26mm) worked as drain wire

and also Braid Shield 85% Coverage

Inner Jacket : PE

Jacket Thickness : 1.00 mm

Overall Diameter : 8.10 mm

Outer Jacket : PVC

Jacket Thickness : 1.10 mm

Overall Diameter : 10.30 mm


Listing and Ratings


: UL Type CL3 (E125840)

: CSA Type AWM FT4 (LL80602)

Voltage Rate : 300V

Temperature Rate : 75°C

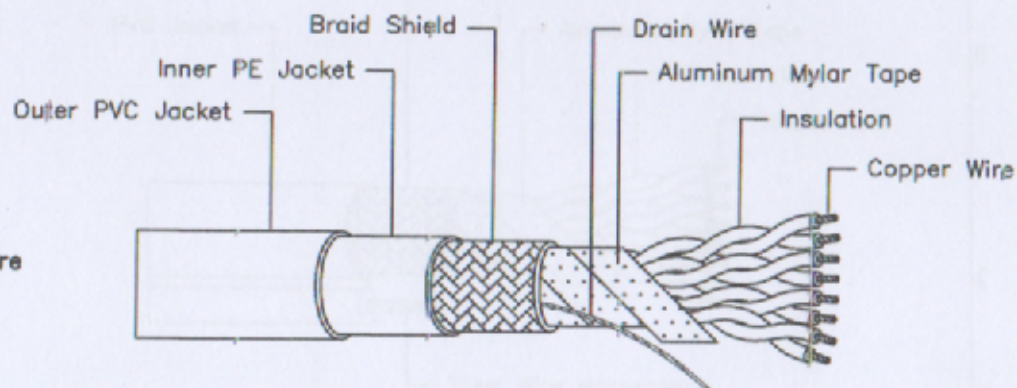

Designed by date	Checked by - date	Approved by - date	Date	Size	Scale
			18/06/2009	A4	-
 HOSIWELL TECHNOLOGY CO., LTD. 15 MOO 5 TANGSAMUE, A. BANGPAEONG, CHAOCHONGSAO, BANG DRALAND TEL. 011-7079411, 011-7079411			Part Name	Computer & Data Cable	Unit
			Part No.	IEDC2204P-01	Issued
			Ref. No.		Sheet
			Used On.		1 of 1