

Description :

Conductor

22AWG x 4 Pairs (7/0.26 mm) Tinned Copper Wire

Insulation : PE

Insulation Thickness : 0.25 mm

Insulation Diameter : 1.30 mm

Construction

Each Insulation Paired

4 Pairs Twisted Together with Aluminum Mylar Tape,

Tinned copper wire 22AWG (7/0.26mm) Worked as drain wire and also Braid Shield 85% Coverage

Jacket : PVC

Jacket Thickness : 1.00 mm

Overall Diameter : 8.10 mm

Messenger :

Nominal Diameter of Messenger : 1.60 mm (7/7/0.16mm Strand)

Nominal Diameter Overall Jacket for Messenger : 3.30 mm

Nominal Jacket Thickness for Messenger : 0.85 mm


Listing and Retings


: UL Type CL3 (E125840)

: CSA Type AWM FT4 (LL80602)

Voltage Rate : 300V

Temperature Rate : 75°C

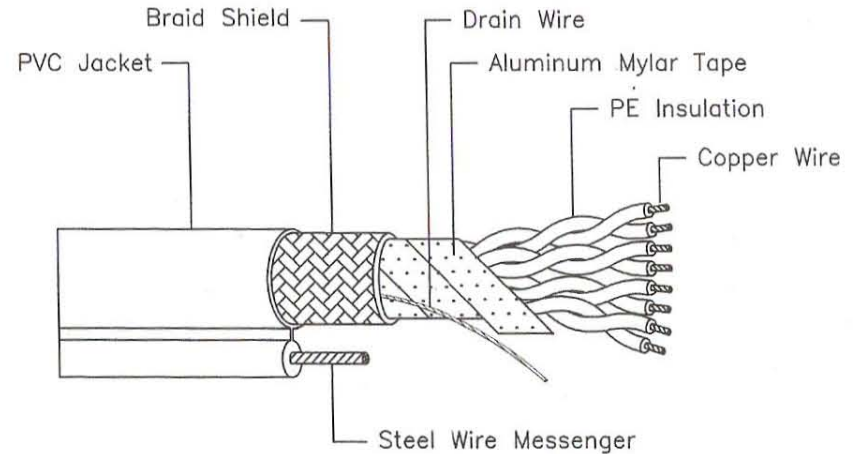

Designed by date	Checked by - date	Approved by - date	Date 22/08/2008	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD. 79 MOO 5 T.BANGSAMUK, A. BANGPAKONG, CHACHONGSAO, 24180 THAILAND. TEL. 038-570070-3, FAX. 038-570069			Part Name Computer & Data Cable	Unit -	
			Part No. IEDC2204P-S	Issued 1	
			Ref. No.	Sheet	
			Used On.	1 of 1	