UL2464 MULTICORE CABLE

Multicore Overall Foiled (CF..Series)

This general purpose multicore cables constructed from Tinned stranded copper conductor, PVC insulated Aluminium mylar taped for our CF....series and add overall Tinned copper Braiding 85% on our CB....series, PVC jacket passed UL type CL2,3 flame test. Rating is 300 V. and 80 o C

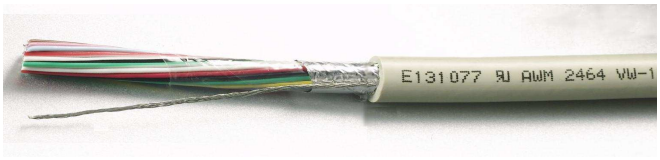

NEC Type CSA Type No.	Description UL / AWM	AWG	Conductor Stranded (No/mm)	No. of Cond	Insulation Thick mm.	Insulation Nom. mm.	Jacket Thick mm.	Jacket Nom. mm.	Nominal Capacitance A pf/ft	Nominal Capacitance B pf/ft	Part Number
CF.. Series											
											UL 2464 OVERALL FOILED
NEC CL2 **PCC** **FT1**	**2464** **IIA**	26	**(7/0.160)**	4C	0.25	1.0	0.8	4.5	32	52	CF642604
				6C	0.25	1.0	0.8	5.1	28	51	CF642606
				9C	0.25	1.0	0.8	5.8	28	51	CF642609
				12C	0.25	1.0	0.8	6.0	28	51	CF642612
				16C	0.25	1.0	0.85	6.7	28	51	CF642616
				25C	0.25	1.0	1.20	8.0	28	51	CF642625